

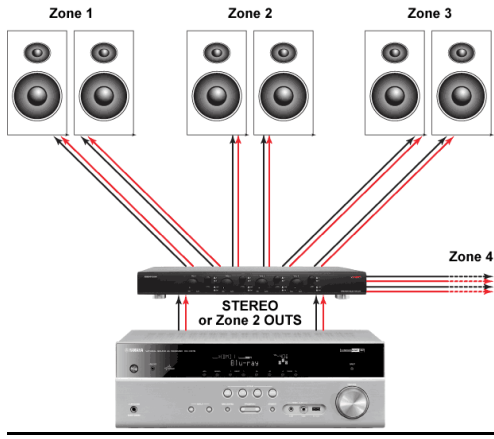


Equip for SMART ROOM

#		Item	Q	U-price	T-price
1.		<p style="text-align: center;"><u>Workstation</u></p> <p>AMS Z4 G4 Workstation Datasheet Windows 10 Pro for Workstations Intel® Xeon® W2104 (3.2 GHz, 8.25 MB cache, 4 cores) Discrete: NVIDIA® Quadro® P400 (2 GB GDDR5 dedicated) 8 GB DDR4-2666 ECC SDRAM (1 x 8 GB) 1 TB NVME 465 W internal power supply, up to Monitor 22 in Realtek HD ALC221 HP USB Optical Mouse HP USB Business Slim Keyboard</p>	1	2000	2000
3.		<p style="text-align: center;"><u>Personal business Laptop (HP) Equivalent</u></p> <p>11th Generation Intel Core i7- Processor 15.6-inch diagonal HD SVA WLED-backlit screen 16GB DDR4 SDRAM HDD 1T (Western digital) + SSD M.2 256GB NVMe Graphics Card: NVIDIA GeForce 930MX 2GB Full-sized island-style keyboard with numeric keypad; 2 x USB 3.1 Gen 1 (Data Transfer Only), 1 x USB 2.0, 1 x HDMI, 1 x RJ-45, 1 x</p>	1	1,040	1050
4.		<p style="text-align: center;"><u>Sound system</u></p> <p>SBID 8070i-G4 SMART Board 8070i-G4 interactive flat panel (x3) WM-SBID-501 Wall mount (x3) CAM301 Camera MIC500 Table microphone (x2) MIX500 Audio processor CSR500 Speakers Included cables For interactive flat panels 20' 8" (6.3 m) HDMI (x3) 4' (1.3 m) USB power (x3) For camera 16' 5" (5 m) USB Power For table microphones and audio processor 30' (9 m) audio (audio processor to microphone) 13' (4 m) audio (microphone to microphone) 16' 5" (5 m) USB Power For speakers 6' (1.8 m) dual RCA (audio processor to speaker) 16' 5"</p>	1	1100	1100

		(5 m) audio (speaker to speaker) Power			
5.		65 or 75 inch led 4k UHD AG finger touch interactive tv touch screen conference table smart white board android display for classroom Resolution 3840x2160 OS Android 8.0 Interfaces USB3.0, HDMI, MIC, RS232, VG CPU: Dual-core A73 and dual-core A53 , 1.5GHz; GPU: Quad-core MaliG51	1	1900	1900
6.		APC Back-UPS Pro BX1000M or Equivalent 1000VA / 600W Backup Battery 8 Outlets: 4 Battery Back up & Surge Protector, plus 4 Surge Protector Only Automatic Voltage Regulation (AVR). UPS Battery Backup AVR instantly Multi-function LCD status and control Nominal Output Voltage: 22	1	350	350
8.		Epson Wireless LAN Module (ELPAP07) or Equivalent Wireless Network Projection users can remotely access and control Epson projectors over the wireless LAN. Compliant with 802.11 b/g/n standards Uses USB type A connector Compatible with PC or Mac Able to transmit audio	5	80	400
9.		Epson ELPLP91 Replacement Lamp for the Powerlite 680/685W & BrightLink 685Wi/695Wi Projectors	5	130	650
Total (\$)				7450	

Dr. Abdrabou alanzi